




# FUSION COMBI SCRAPER 85/55/85

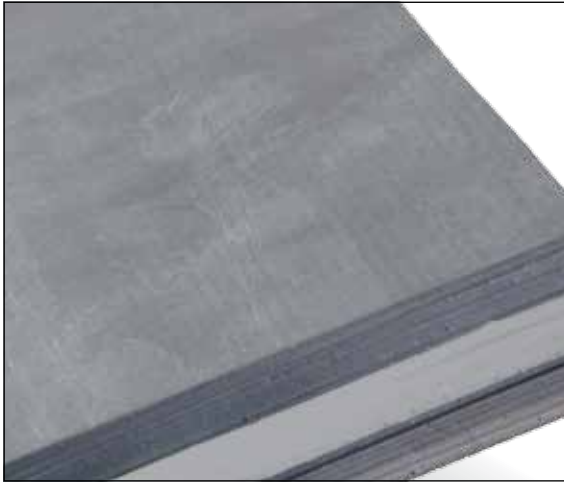

Fusion Combi 85/55/85 is a vulcanized laminate of 2 hard outer layers containing a softer inside grey layer. Perfect for larger sticky applications.

### FEATURES:

- Twice the wear life of commercial SBR rubber
- Produced with the finest natural rubber
- Multi-layer construction provides long wear life with excellent cleaning capabilities
- Hard outside layers provide impact protection
- Soft inside layer provides superior squeegee type cleaning

### PROPERTIES

Colour	Black	Grey
Elastomer	SBR	SBR
Tensile Strength	19.5 Mpa	15.0 Mpa
Elongation at Break	400%	530
Density	1.17 g / cm <sup>3</sup>	1.10 g / cm <sup>3</sup>
Hardness	85 Shore A	55 Shore A
Abrasion Resistance	100 mm <sup>3</sup>	160 mm <sup>3</sup>

PRODUCT CODE	Thickness/Gauge		Width		Roll Length		Roll Weight	
	in	mm	in	mm	ft	m	lbs	kg
CCR-8555-7506	3/4	20	6.0	150	50	15.25	88	40
CCR-8555-7508	3/4	20	8.0	200	50	15.25	111	50
CCR-8555-755950	3/4	20	59.0	1500	50	15.25	854	388
CCR-8555-1006	1	25	6.0	150	50	15.25	107	49
CCR-8555-1008	1	25	8.0	200	50	15.25	138	63
CCR-8555-105950	1	25	59.0	1500	50	15.25	910	413
CCR-8555-1506	1 1/2	40	6.0	150	50	5	45	20
CCR-8555-1508	1 1/2	40	8.0	200	50	5	57	26
CCR-8555-155950	1 1/2	40	59.0	1500	50	5	525	239
CCR-8555-2006	2	50	6.0	150	50	5	95	43
CCR-8555-2008	2	50	8.0	200	50	5	76	35
CCR-8555-205950	2	50	59.0	1500	50	5	700	319



**Note:** The above data is based on extensive testing and represents standard values. Shaw Almix Industries reserves the right to make changes without prior notice and refuses all claims arising from such changes. All items are subject to change without previous notice.

Updated: Dec. 2011